



## APPLICATIONS

- Compression and two orthogonal shear wave velocities
- Dynamic elastic constants
- High temperature application (optional)



## DESCRIPTION


The triaxial acoustic HOEK cell is designed to transmit compressional (P) and shear waves (S1/S2) through rock samples under conditions of overburden pressure and room temperature. The sample must be positioned between two adjustable loading pistons and compressed using a load frame. A specialized sleeve serves to isolate the sample from the hydraulic confining fluid. A distinct advantage of this setup is the ability for quick sample loading and unloading, eliminating the need to drain the confining fluid or remove the core sleeve. The cell consists of a hollow steel cylinder with screw-on, detachable ends, along with two high-resistance spherically seated acoustic loading platens, a pair of female spherical seats, and an isolating sleeve. To apply the axial force to the sample, an external compression testing frame is necessary. Additionally, a high-pressure pump is required to produce the confining pressure. Three acoustic HOEK cell models are available. Each model is designed to accommodate specimens of various diameters, ranging from 21.5 mm to 101.6 mm. Polyurethane sleeves can be replaced with Viton sleeves for high-temperature applications. When equipped with a Viton sleeve and a heating jacket, the acoustic HOEK Cell provides an efficient and reliable solution for performing triaxial tests at elevated temperatures.

## FEATURES

Standard:	ASTM (D2845)
Confining pressure:	70 MPa (10,000 psi)
Temperature:	Ambient to 120°C (option)
Waves:	P, 1 & S2
Frequency:	1 Mhz
Specimen diameter:	<b>Type 1:</b> 21.5 mm (0.845 inch) 25.4 mm (1.0 inch) 30.1 mm (1.185 inches) 38.1 mm (1.5 inches) <b>Type 2:</b> 42.0 mm (1.654 inches) 47.6 mm (1.654 inches) 54.7 mm (2.154 inches) 63.5 mm (2.5 inches) <b>Type 3:</b> 76.2 mm (3.00 inches) 85 mm (3.34 inches) 101.6 mm (4 inches)
Specimen length:	Twice the diameter
Wetted part material:	Stainless steel
Sleeve material:	Polyurethane or Viton
Pore port:	1/8 inch
Confining port:	3/8 inch

## TEST PROCEDURE

The sample, along with the acoustic emitter and receiver platens, is encased in a specialized sleeve. Both spherical seats are strategically positioned to align the cylindrical specimen's longitudinal axis with the cell chamber's own axis. A minimal confining pressure is initially applied to secure the sleeve tightly against the rock. Following this, the cell, complete with its spherical seats, is positioned in a suitable loading frame, where axial and confining pressures are then administered. The acoustic platens are linked to a pulser-receiver system. This system generates an electrical pulse that stimulates a piezoelectric transducer, resulting in the emission of an acoustic pulse. This acoustic pulse journeys through the rock core to a second transducer, which serves as a receiver. The received pulse is converted back into an electrical signal, which is subsequently amplified and

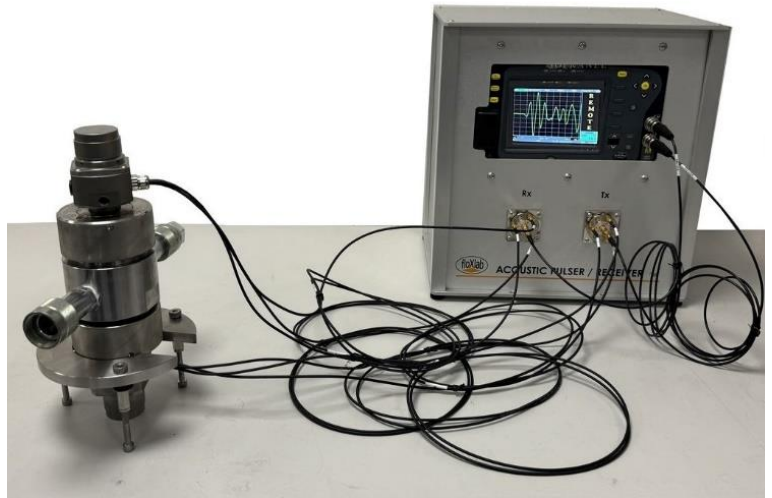

conditioned by the receiver unit. Acoustic signals are then automatically captured by a computer, displaying both compressional (P) and shear (S1 & S2) waveforms. From these readings, both compressional and shear acoustic velocities are calculated, along with dynamic elastic constants.

## TEST RESULTS

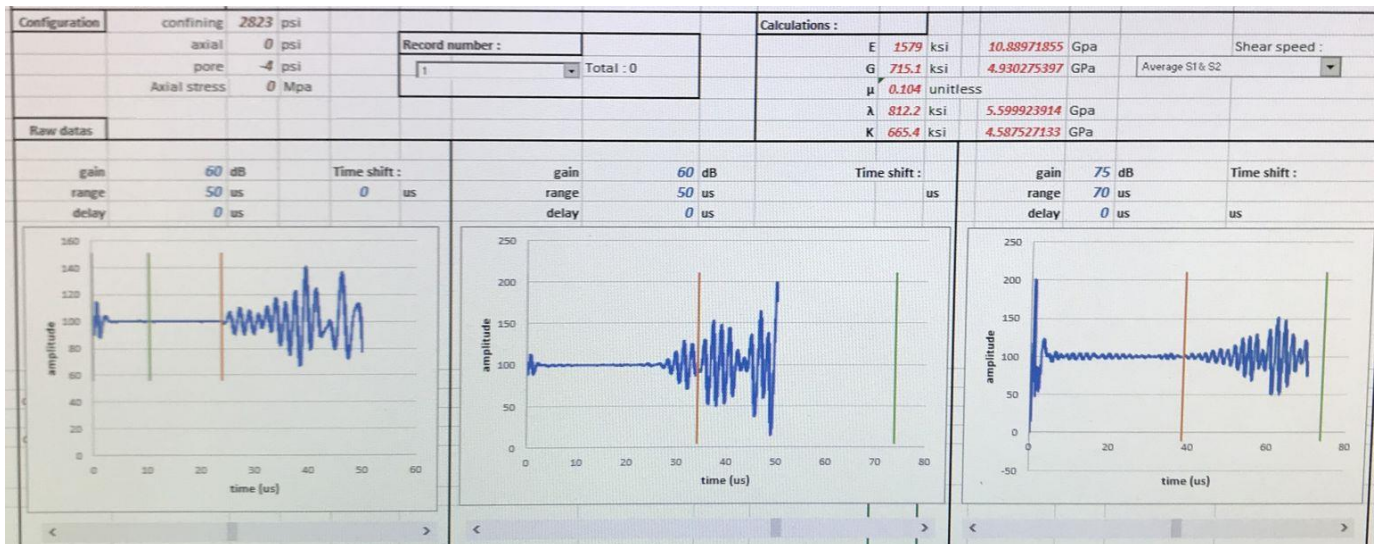


Fig.1 Compressional and shear waves measurement